



High Capacity ASME Electric Tankless Water Heater

The Hubbell Tankless TXA water heater can provide flow rates up to 40GPM with a temperature range of 32–194°F

Available up to 162 kW in three phase voltage

Instantaneous design reduces stand-by heat loss and significantly lowers operating costs compared to traditional storage systems

Constructed with high-grade materials to ensure long operating life

Digital temperature controls

- Factory packaged heater provides trouble-free installation and operation
- Solid state switching that fully modulate between 0–100%
- Wide selection of sizes to meet the needs of even the most demanding application

Applications

Process systems, wash downs, heat pump back-up, boiler systems, freeze protection, heat transfer systems, supplemental heat, point-of-use hot water, limited floor space and much more.

NOTE: Manufactured in an ISO 9001:2015 facility. BABA & BAA compliance is available upon request.



Meets the requirements of the ASME Boiler and Pressure Vessel Code



TXA

TANKLESS SERIES

Tankless water heater for commercial and industrial use

The TXA electric tankless water heater is highly reliable, easily maintained and designed specifically for commercial or industrial applications. Each unit includes digital temperature controls, high quality ASME stamped pressure vessel, has outstanding efficiency, and occupies minimum wall space. The unit is designed to be a reliable, long lasting source for hot water.

Over 100 years of water heating expertise

Hubbell water heaters are the right choice for your commercial and industrial applications. We have water heating solutions for most energy sources with storage capacities from 1–10,000 gallons — all designed, engineered, and manufactured for reliability and longevity coupled with unparalleled support and service.

Technical Features

Temperature Controller

A sophisticated electronic temperature controller with LED digital display provides the user interface. The temperature controller processes all flow and temperature data and calculates the precise amount of power needed to meet demand.

| Temperature Controller Capabilities | |
|-------------------------------------|---|
| Power Limiting: | Allows the operator to reduce the power consumption by any percentage to provide installation and operational flexibility and savings. |
| Diagnostics: | Display inlet and outlet temperatures, flow rate and error codes to assist in troubleshooting. |
| Cost Calculator: | Determine the exact cost of operating the heater. Input your cost per kW-Hr and the controller displays total kW-HRs consumed, total cost of operation, and total hot water usage (shown in gallons or liters). |
| Temperature Control: | Set the digital display to the desired water temperature in °F or °C. Fully adjustable in 1° increments from 32–194°F (0–90°C). A user adjustable +/- 3° calibration feature provides additional control for superior accuracy. |

Full Heater Modulation

Each heating element is switched on/off using a fast acting solid state triac with zero cross over firing control. This switching scheme provides full modulation of each heating element, ensuring that the precise amount of heat is added to meet demand.

Proper Power Integrity

All Hubbell tankless water heaters, including all 3 phase models, are engineered to operate as a balanced load and operate at 0.999 Power Factor. All Hubbell 3 phase models are designed for 3 wire (3 live, 1 ground) and 4 wire power systems and draw equal current across all conductors to maintain the power integrity of the users electrical system. Hubbell does not recommend the use of heaters that operate as an unbalanced load. All load switching in Hubbell tankless models is performed as zero cross over, eliminating phase angle firing interference and associated EMI issues.

Full Resource Staging

The Hubbell tankless control scheme ensures that usage is equalized across all heating circuits. To achieve this, once the controller has calculated the precise amount of kW required, all circuits are energized in a staggered fashion such that each circuit is proportionally and independently energized and then time staggered between circuits. This Full Resource Staging Scheme reduces EMI output, increases component longevity, and provides highly accurate and consistent hot water temperatures. For three phase models, all circuits are fully modulated and synchronized to operate as a balanced load.

BACnet Module


The Hubbell BACnet interface unit implements BACnet MS/TP protocol. The device comes from the factory ready to be operated. The unit can be reconfigured easily with a USB cable and the BACnet Network Utility program located on the Hubbell web page. The BACnet includes features such as set temperature, power limiting, power setting, temperature in and out, flow rate, flowmeter error and leak detections. Note that internet protocol is not supported.

Heater Specifications

| | |
|---------------------------------|--|
| Heating Chamber | Stainless Steel |
| Wattage Range | 5–162 kW |
| Orientation | Wall Mounted |
| Voltages | 208–600 Volt, 50/60 HZ |
| Phases | 3Φ (balanced) |
| Power Factor | 0.999 |
| Thermal Efficiency | 98% + |
| Inlet / Outlet Size | 1" FNPT |
| Min/Max Flow | 0.5 GPM Min, 40 GPM Max |
| Max Inlet Temp.: | 150°F |
| Thermostat Range | 32–194°F / 0–90°C |
| Hi-Limit | 200°F (Fixed temperature) |
| Design WP | 150 psi |
| Design TP | 225 psi |
| Elements | Incoloy 800 |
| Standby Power | < 3 Watts |
| Heating Chamber Warranty | 5 Year |
| Electrical Warranty | 1 Year |
| Enclosure | Painted Steel NEMA 4 IP65/IP66 Rating |
| Approvals | ETL and ASME |



All information is subject to change without notice. Consult factory for submittal drawings.

Inside the Tankless TXA (2 chamber model shown)

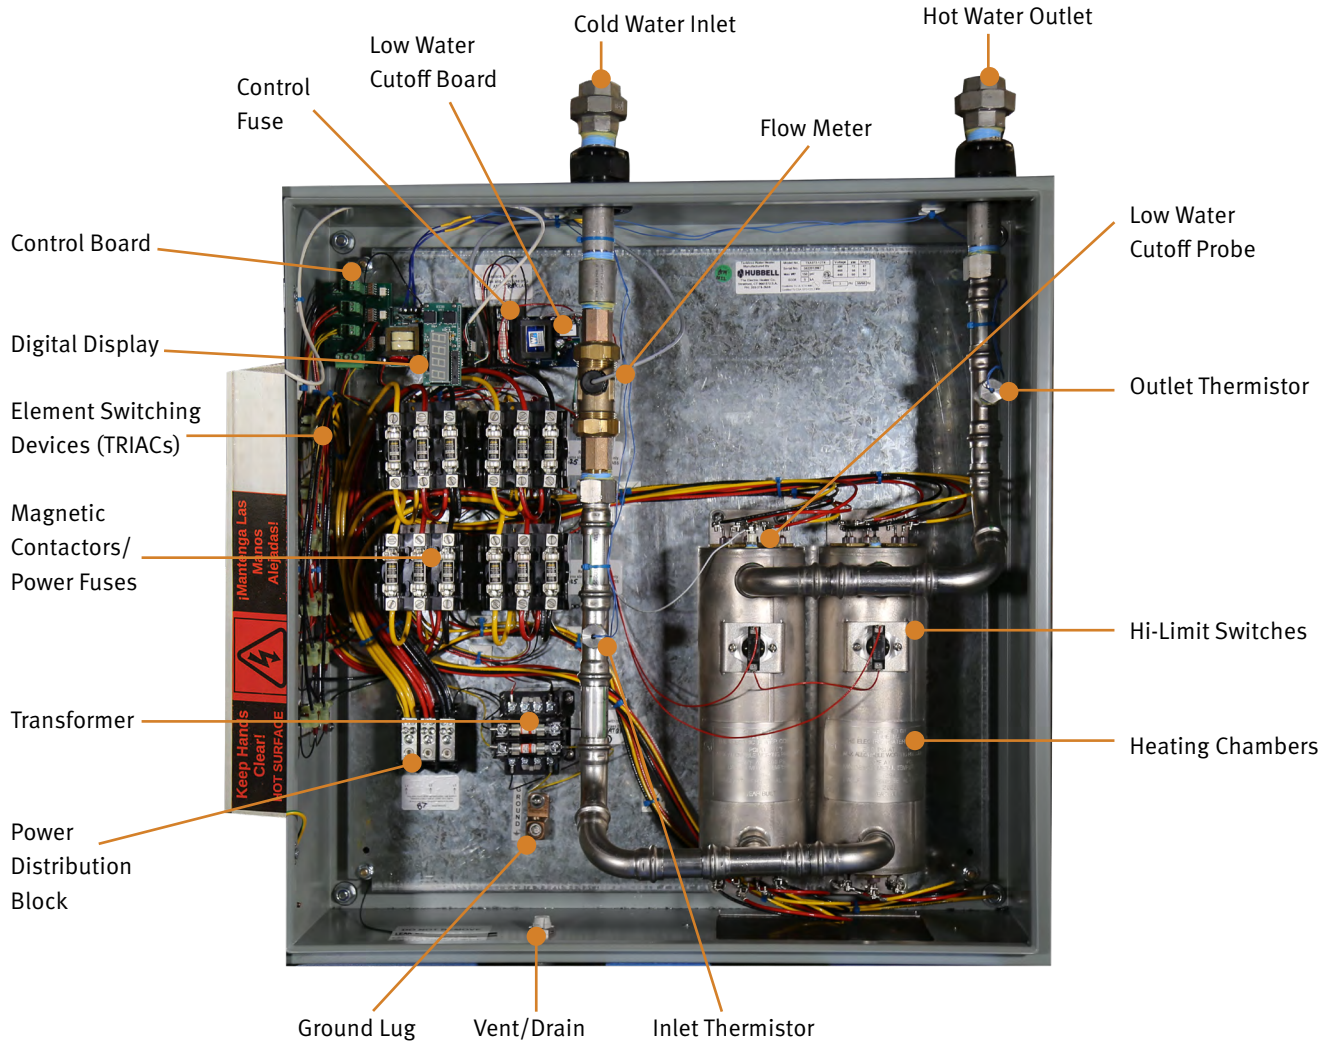

Dimensions

3 & 6 Element

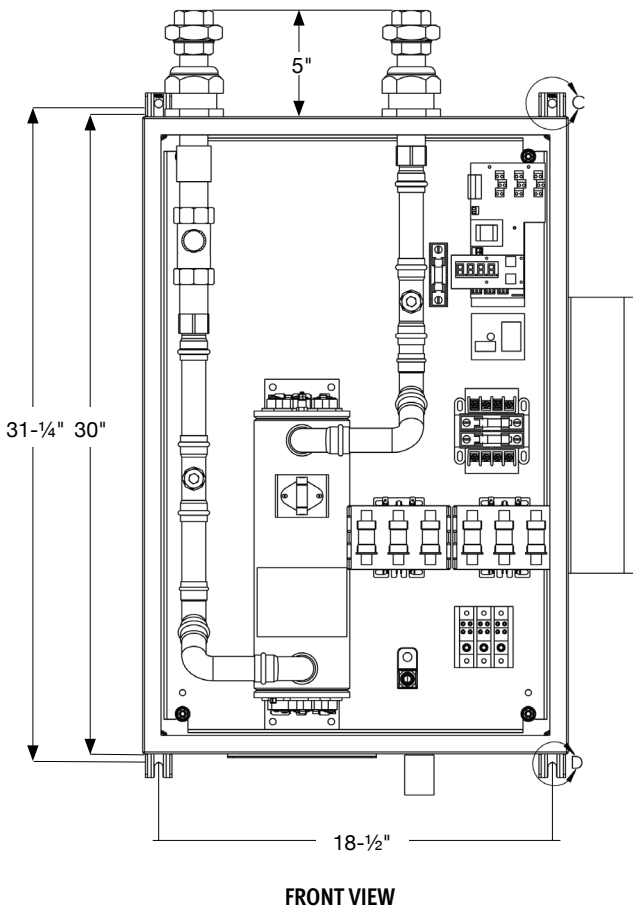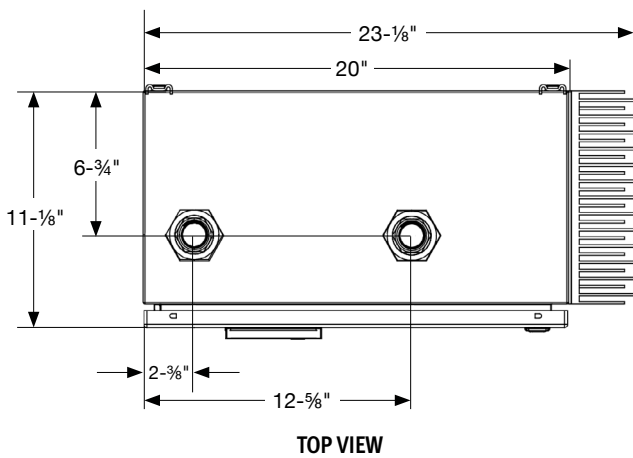

All information is subject to change without notice. Consult factory for submittal drawings.

kW and Amperage Selection Chart

3 Element

(Amperage shown in chart below indicates available models)

| kW | 3 Element 3 Phase Voltages | | | | | | |
|----|-------------------------------|-----|-----|-----|-----|-----|-----|
| | 208 | 240 | 380 | 415 | 440 | 480 | 600 |
| 5 | 14 | | | | 7 | | |
| 6 | | | | | 8 | | |
| 7 | | | | | 9 | 8 | |
| 11 | 31 | | 17 | | 14 | | |
| 12 | 33 | | | | | | |
| 13 | | | 20 | 18 | 17 | | |
| 14 | | 34 | | | | 17 | |
| 15 | | | 23 | | 20 | | |
| 16 | 44 | 39 | | 22 | 21 | | |
| 18 | 50 | | 27 | 25 | 24 | 22 | |
| 20 | 56 | | 30 | 28 | 26 | | |
| 21 | | 51 | | | 28 | 25 | 20 |
| 24 | | 58 | 37 | 33 | 32 | 29 | 23 |
| 27 | | 65 | | | 35 | 33 | 26 |



6 Element

(Amperage shown in chart below indicates available models)

| kW | 6 Element 3 Phase Voltages | | | | | | |
|----|-------------------------------|-----|-----|-----|-----|-----|-----|
| | 208 | 240 | 380 | 415 | 440 | 480 | 600 |
| 25 | 69 | | | | | | |
| 27 | | | 41 | 38 | | | |
| 30 | | | 46 | | | | |
| 31 | 86 | | | 43 | 41 | | |
| 33 | | 79 | | | | | |
| 36 | 100 | | 55 | 50 | 47 | 43 | |
| 40 | | | 61 | 56 | 53 | | |
| 42 | | 101 | | | 55 | 51 | 40 |
| 48 | | 116 | | 67 | 63 | 58 | 46 |
| 54 | | | | | 71 | 65 | 52 |

Dimensions

12 Element Sample dimensions are for a TXA

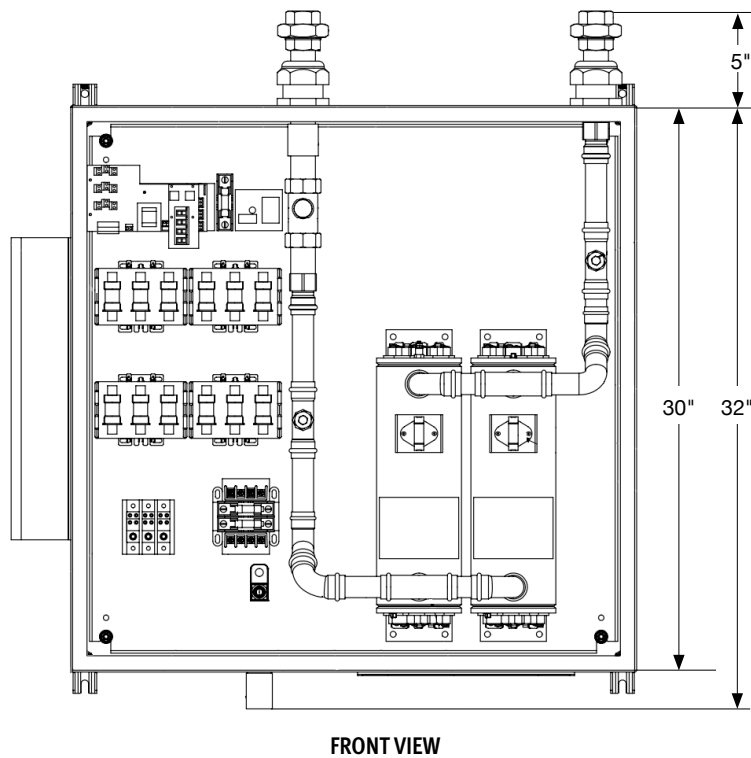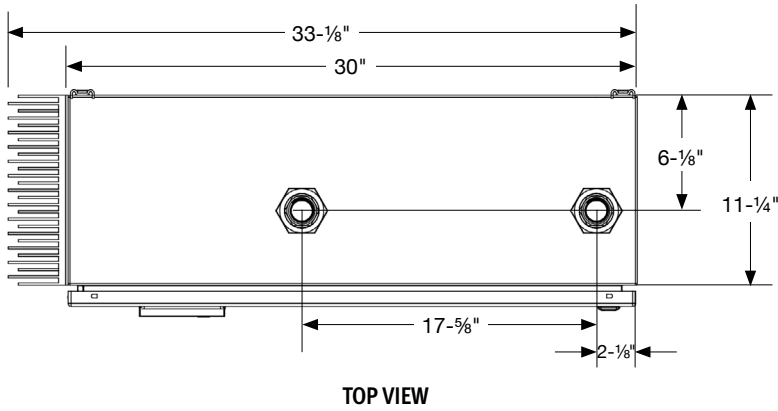

kW and Amperage Selection Chart

12 Element

(Amperage shown in chart below indicates available models)

| kW | 12 Element 3 Phase Voltages | | | | | | |
|-----|--------------------------------|-----|-----|-----|-----|-----|-----|
| | 208 | 240 | 380 | 415 | 440 | 480 | 600 |
| 40 | 111 | | | | | | |
| 50 | 139 | | | | | | |
| 54 | | 130 | | | | | |
| 60 | | | 91 | | | | |
| 63 | 175 | | | 88 | | | |
| 66 | | 159 | | | | | |
| 70 | | | | | 92 | | |
| 72 | 200 | | 110 | 100 | | 87 | |
| 81 | | | 123 | 113 | | | |
| 84 | | 202 | | | 110 | 101 | 81 |
| 96 | | | 146 | 134 | 126 | 116 | 92 |
| 108 | | | 164 | | 142 | 130 | 104 |




All information is subject to change without notice. Consult factory for submittal drawings.


Dimensions

18 Element

Sample dimensions are for a TXA

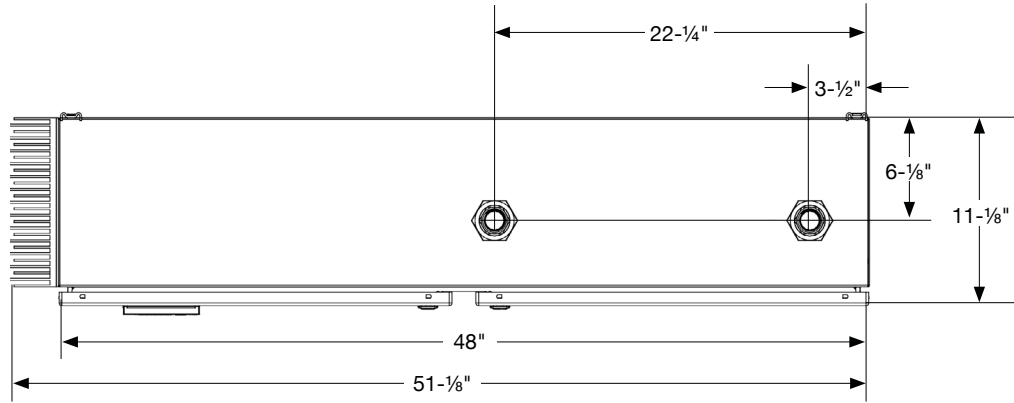

TOP VIEW

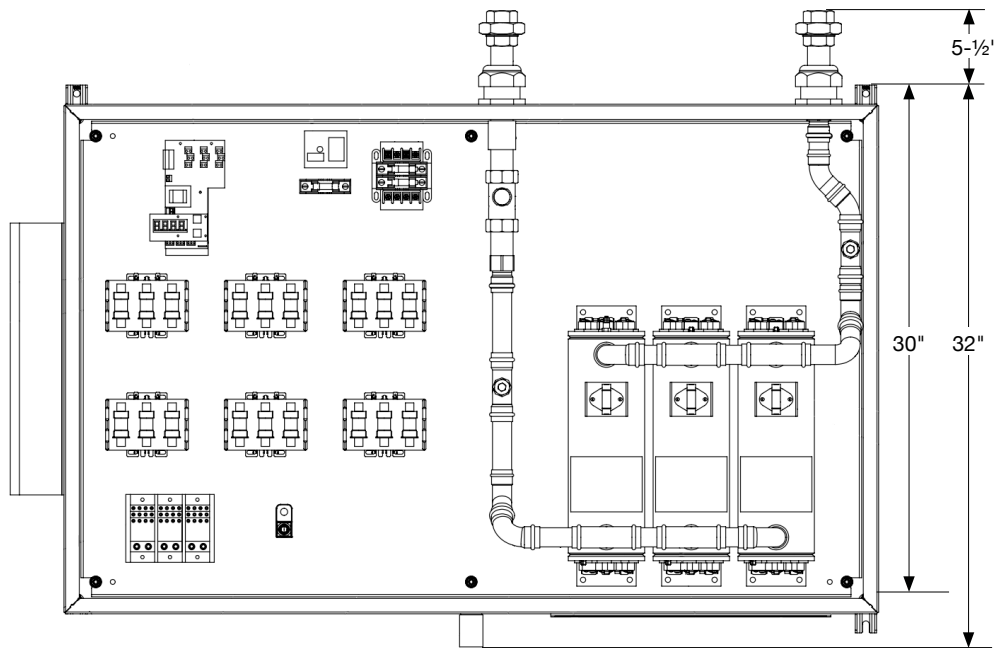

FRONT VIEW

kW and Amperage Selection Chart

18 Element

(Amperage shown in chart to right indicates available models)

| kW | 18 Element 3 Phase Voltages | | | | | | |
|-----|--------------------------------|-----|-----|-----|-----|-----|-----|
| | 208 | 240 | 380 | 415 | 440 | 480 | 600 |
| 75 | 208 | | | | | | |
| 95 | 264 | | | | | | |
| 99 | | 238 | | | | | |
| 121 | | | 184 | 169 | | | |
| 126 | | | | | 166 | 152 | 121 |
| 144 | | | | 201 | 189 | 173 | 139 |
| 162 | | | 246 | | 213 | 195 | 156 |

All information is subject to change without notice. Consult factory for submittal drawings.

Heating Capacity

| kW Rating | Maximum Flow Rate GPM at Temperature Rise (°FΔT) | | | | | | | | | | | |
|-----------|--|---------|---------|---------|---------|---------|---------|---------|---------|----------|----------|----------|
| | 5°F ΔT | 10°F ΔT | 20°F ΔT | 30°F ΔT | 40°F ΔT | 50°F ΔT | 60°F ΔT | 70°F ΔT | 80°F ΔT | 100°F ΔT | 120°F ΔT | 140°F ΔT |
| 5 | 6.8 | 3.4 | 1.7 | 1.1 | 0.9 | 0.7 | 0.6 | 0.5 | 0.4 | 0.3 | 0.3 | 0.2 |
| 6 | 8.2 | 4.1 | 2.0 | 1.4 | 1.0 | 0.8 | 0.7 | 0.6 | 0.5 | 0.4 | 0.3 | 0.3 |
| 7 | 9.6 | 4.8 | 2.4 | 1.6 | 1.2 | 1.0 | 0.8 | 0.7 | 0.6 | 0.5 | 0.4 | 0.3 |
| 8 | 10.9 | 5.5 | 2.7 | 1.8 | 1.4 | 1.1 | 0.9 | 0.8 | 0.7 | 0.5 | 0.5 | 0.4 |
| 9 | 12.3 | 6.1 | 3.1 | 2.0 | 1.5 | 1.2 | 1.0 | 0.9 | 0.8 | 0.6 | 0.5 | 0.4 |
| 10 | 13.6 | 6.8 | 3.4 | 2.3 | 1.7 | 1.4 | 1.1 | 1.0 | 0.9 | 0.7 | 0.6 | 0.5 |
| 12 | 16.4 | 8.2 | 4.1 | 2.7 | 2.0 | 1.6 | 1.4 | 1.2 | 1.0 | 0.8 | 0.7 | 0.6 |
| 14 | 19.1 | 9.6 | 4.8 | 3.2 | 2.4 | 1.9 | 1.6 | 1.4 | 1.2 | 1.0 | 0.8 | 0.7 |
| 16 | 21.8 | 10.9 | 5.5 | 3.6 | 2.7 | 2.2 | 1.8 | 1.6 | 1.4 | 1.1 | 0.9 | 0.8 |
| 18 | 24.6 | 12.3 | 6.1 | 4.1 | 3.1 | 2.5 | 2.0 | 1.8 | 1.5 | 1.2 | 1.0 | 0.9 |
| 20 | 27.3 | 13.6 | 6.8 | 4.5 | 3.4 | 2.7 | 2.3 | 1.9 | 1.7 | 1.4 | 1.1 | 1.0 |
| 24 | 32.8 | 16.4 | 8.2 | 5.5 | 4.1 | 3.3 | 2.7 | 2.3 | 2.0 | 1.6 | 1.4 | 1.2 |
| 25 | 34.1 | 17.1 | 8.5 | 5.7 | 4.3 | 3.4 | 2.8 | 2.4 | 2.1 | 1.7 | 1.4 | 1.2 |
| 27 | 36.8 | 18.4 | 9.2 | 6.1 | 4.6 | 3.7 | 3.1 | 2.6 | 2.3 | 1.8 | 1.5 | 1.3 |
| 30 | | 20.5 | 10.2 | 6.8 | 5.1 | 4.1 | 3.4 | 2.9 | 2.6 | 2.0 | 1.7 | 1.5 |
| 31 | | 21.2 | 10.6 | 7.1 | 5.3 | 4.2 | 3.5 | 3.0 | 2.6 | 2.1 | 1.8 | 1.5 |
| 33 | | 22.5 | 11.3 | 7.5 | 5.6 | 4.5 | 3.8 | 3.2 | 2.8 | 2.3 | 1.9 | 1.6 |
| 36 | | 24.6 | 12.3 | 8.2 | 6.1 | 4.9 | 4.1 | 3.5 | 3.1 | 2.5 | 2.0 | 1.8 |
| 40 | | 27.3 | 13.6 | 9.1 | 6.8 | 5.5 | 4.5 | 3.9 | 3.4 | 2.7 | 2.3 | 1.9 |
| 42 | | 28.7 | 14.3 | 9.6 | 7.2 | 5.7 | 4.8 | 4.1 | 3.6 | 2.9 | 2.4 | 2.0 |
| 48 | | 32.8 | 16.4 | 10.9 | 8.2 | 6.6 | 5.5 | 4.7 | 4.1 | 3.3 | 2.7 | 2.3 |
| 50 | | 34.1 | 17.1 | 11.4 | 8.5 | 6.8 | 5.7 | 4.9 | 4.3 | 3.4 | 2.8 | 2.4 |
| 54 | | 36.8 | 18.4 | 12.3 | 9.2 | 7.4 | 6.1 | 5.3 | 4.6 | 3.7 | 3.1 | 2.6 |
| 60 | | | 20.5 | 13.6 | 10.2 | 8.2 | 6.8 | 5.8 | 5.1 | 4.1 | 3.4 | 2.9 |
| 63 | | | 21.5 | 14.3 | 10.7 | 8.6 | 7.2 | 6.1 | 5.4 | 4.3 | 3.6 | 3.1 |
| 66 | | | 22.5 | 15.0 | 11.3 | 9.0 | 7.5 | 6.4 | 5.6 | 4.5 | 3.8 | 3.2 |
| 70 | | | 23.9 | 15.9 | 11.9 | 9.6 | 8.0 | 6.8 | 6.0 | 4.8 | 4.0 | 3.4 |
| 72 | | | 24.6 | 16.4 | 12.3 | 9.8 | 8.2 | 7.0 | 6.1 | 4.9 | 4.1 | 3.5 |
| 75 | | | 25.6 | 17.1 | 12.8 | 10.2 | 8.5 | 7.3 | 6.4 | 5.1 | 4.3 | 3.7 |
| 81 | | | 27.6 | 18.4 | 13.8 | 11.1 | 9.2 | 7.9 | 6.9 | 5.5 | 4.6 | 3.9 |
| 84 | | | 28.7 | 19.1 | 14.3 | 11.5 | 9.6 | 8.2 | 7.2 | 5.7 | 4.8 | 4.1 |
| 95 | | | 32.4 | 21.6 | 16.2 | 13.0 | 10.8 | 9.3 | 8.1 | 6.5 | 5.4 | 4.6 |
| 96 | | | 32.8 | 21.8 | 16.4 | 13.1 | 10.9 | 9.4 | 8.2 | 6.6 | 5.5 | 4.7 |
| 99 | | | 33.8 | 22.5 | 16.9 | 13.5 | 11.3 | 9.7 | 8.4 | 6.8 | 5.6 | 4.8 |
| 108 | | | 36.8 | 24.6 | 18.4 | 14.7 | 12.3 | 10.5 | 9.2 | 7.4 | 6.1 | 5.3 |
| 116 | | | 39.6 | 26.4 | 19.8 | 15.8 | 13.2 | 11.3 | 9.9 | 7.9 | 6.6 | 5.7 |
| 126 | | | | 28.7 | 21.5 | 17.2 | 14.3 | 12.3 | 10.7 | 8.6 | 7.2 | 6.1 |
| 144 | | | | 32.8 | 24.6 | 19.7 | 16.4 | 14.0 | 12.3 | 9.8 | 8.2 | 7.0 |
| 162 | | | | 36.8 | 27.6 | 22.1 | 18.4 | 15.8 | 13.8 | 11.1 | 9.2 | 7.9 |

Notes:

Alternate voltages including 277, 380, 415, 440, 575 and 600 volts available. Please consult factory for exact kW availability in these voltages.

Tankless TXA Model Number Designation

| MODEL | See pages 5–6 for available kW and heating element combinations. | | | OPTIONAL EQUIPMENT |
|------------|--|----------------------------|---|--|
| | KW RATING | NUMBER OF HEATING ELEMENTS | VOLTAGE / PHASE | |
| TXA | 5 – 162 | 3 6 12 18 | Balanced 3Φ R = 208/3 T = 240/3 T3 = 380/3 T7 = 415/3 T5 = 440/3 T4 = 480/3 T6 = 600/3 | Write/type optional equipment code in the gray box below in alphabetical order. For multiple options separate codes with a dash (-). |

TXA — —

Example: TXA024-3T4-C35

A Hubbell Tankless TXA ASME stamped tankless electric water heater rated for 24kW, with 3 heating elements to be powered at 480 volts, three phase, 60 Hz power with optional BACnet communication module.

Optional Equipment *Note: Optional equipment must be called out in the written specifications, use the codes below.*

Controller

- C15** Non-Fused Disconnect Switch
- C16** Fused Disconnect Switch
- C35** BACnet Communication Module with T1000 Digital Controller
- C51** Remote Control Display, Allows the Heater to be Installed in a Remote Location. The 3" X 5" NEMA 4 Display Enclosure can be Located up to 25' from the Heater
- C59** Integrated PLC Control Package

Electrical

- E8** Built-In Circuit Breaker with Safety Handle

General

- G3** Enclosure Heater (Specify Minimum Temperature Expected)
- G9** Explosion Resistant Construction (Specify Class, Division, Group, and Temperature Class)
- G16** NEMA 4X Rating

Vessel

- V41** Alternate Threaded Inlet/Outlet Connections Size

Please note: Optional equipment may impact overall dimensions and weight. Please request submittal drawing from factory.

Available Accessories

Tankless Valve Kit: Inlet and outlet valve assembly simplifies installation. Includes unions, shut offs, check valve, drain ports and pressure relief valve. For 1", specify part number "TANKLESS VALVE KIT 1"

10-year Warranty: 10-year non pro-rated tank warranty, specify part number "VESSEL WARRANTY"

Accessories Name

Part #

Accessories Name

Part #